This listing of claims will replace all prior versions, and listings, of claims in the application:

1.(Currently Amended) An additive for improving cold-flow and lubricating properties of fuel oils, comprising

A) 20 – 80% by weight of at least one oil-soluble amphiphile selected from the group consisting of glyceryl monooleate, oleic acid diethanolamide, oleic acid, tall oil fatty acid, polyisobutenylsuccinic anhydride diesterified with diethylene glycol, and $C_{18}H_{35}$-O-CH_2-CH(OH)-CH_2OH and

B) 20 – 80% by weight of a terpolymer containing from 3 to 18 mol% of structural units derived from an ester of a carboxylic acid having from 2 to 4 carbon atoms, from 0.5 to 10 mol-% of structural units derived from [[is]] a vinyl ester of a neocarboxlic acid selected from the group consisting of neononanoic acid, neodecanoic acid, neoundecanoic acid, neododecanoic acid, and mixtures thereof, and structural units of ethylene to 100 mol%, and having a melt viscosity, measured at 140°C, of from 20 to 10,000 mPas.

2.(Canceled)
3.(Canceled)
4.(Canceled)
5.(Canceled)

6.(Previously Presented) The additive as claimed in claim 1, wherein the melt viscosity at 140°C of said terpolymer of component B) ranges from 50 to 5000 mPas.

7.(Canceled)
8.(Canceled)

9.(Previously presented) A fuel oil comprising the additive as claimed in claim 1.

10.(Canceled)

11.(Previously presented) An additive mixture comprising the additive of claim 1 and paraffin dispersants of the formula

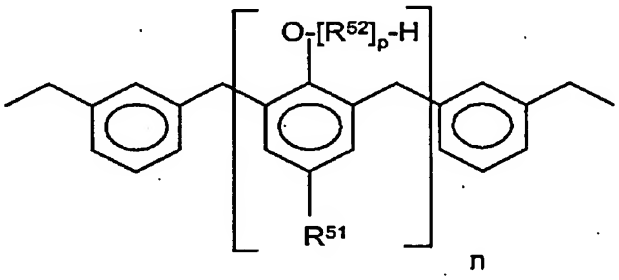

in which R^{51} is C_4-C_{50}-alkyl or C_4-C_{50}-alkenyl, O-[R^{52}] is ethoxy and/or propoxy, n is a number from 5 to 100 and p is a number from 0 to 50,
or comb polymers of the formula

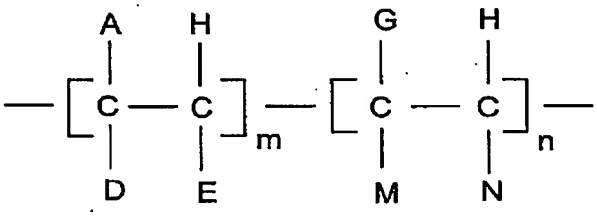

in which

A is R', COOR', OCOR', R"-COOR' or OR';
D is H, CH_3, A or R";
E is H or A;
G is H, R", R"-COOR', an aryl radical or a heterocyclic radical;
M is H, COOR", OCOR", OR" or COOH;
N is H, R", COOR", OCOR, COOH or an aryl radical;
R' is a hydrocarbon chain having 8 to 150 carbon atoms;

R" is a hydrocarbon chain having 1 to 10 carbon atoms;

m is a number from 0.4 to 1.0; and

n is a number from 0 to 0.6, the mixing ratio of said additive to paraffin dispersant or comb polymer being from 1:10 to 20:1.